

Top links and hooks

LH Lift's top links are an essential mounting mechanism and are engineered to be functional and easy to use. LH Lift manufactures both mechanic and hydraulic top links. Our range of top links covers everything from light-duty (CAT 1) to heavy-duty (CAT 4) applications.


Common features of all of our top links:

- Easy to adjust without extra tools
- Easy mounting ensured by a wide adjusting range
- Quick and secure mounting to an implement with a quick coupling hook

Top link with hook and ball end




Top link with ball ends

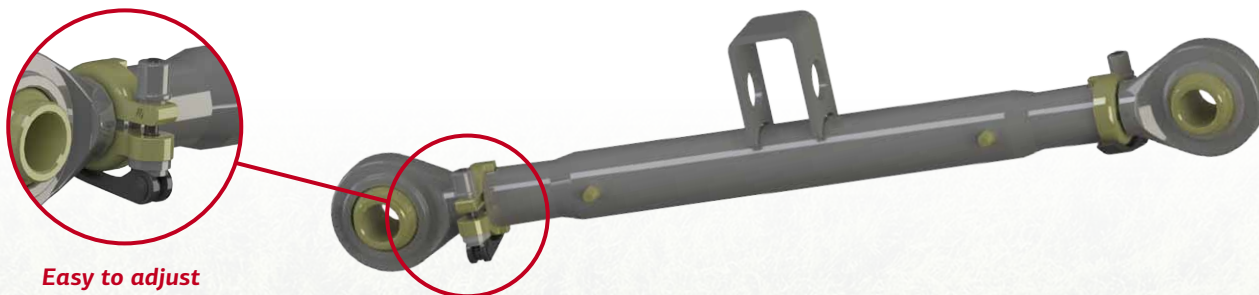

Easy to adjust
without extra
tools.

Top link with hook and swivelling eyebolt

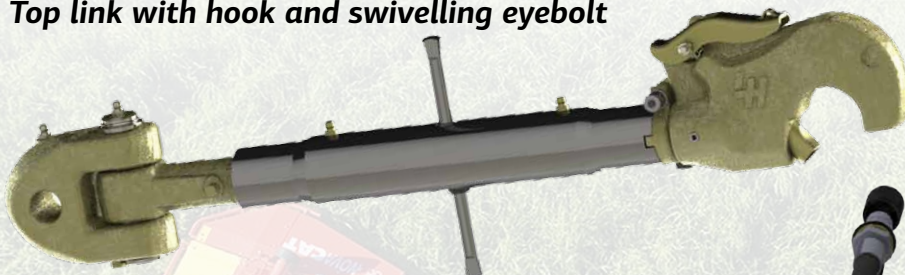

Hydraulic top link with hook and swivelling eyebolt



LH  **Lift**


Faster. Smarter. Done.

Top link and coupling options



Ball ends

Diameter	Thread size
75 mm	M27
85 mm	M30
102 mm	M33
108 mm	M36

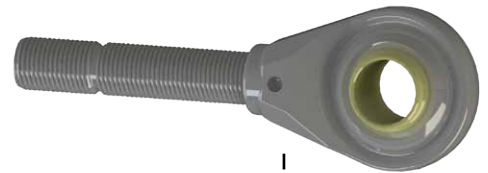

Adjusting tube

Category	Shaft diameter
Cat 2	45x5 mm
Cat 3	51x6 mm
Cat 4	70x9 mm



Ball ends with replaceable ball

Category	Thread size
Cat 2	M27, M30
Cat 3	M33, M36
Cat 4	M36, M40, M45

Swivelling eyebolt

Thread size	Diameter
M36	25,4 mm
M40	



Hooks

Category	Thread size
Cat 2	M27, M30
Cat 3	M33, M36
Cat 4	M40, M50

